DOOR SCHEDULE

DOOR	QTY.	SIZE	DOOR	FRAME	COMMENTS
A.1	1	6'-0" X 7'	EXTERIOR STOREFRONT ALUMINUM WITH TEMPERED GLASS	STOREFRONT ALUMINUM	PROVIDE : 3 PAIR PIVOT HINGES, THRESHOLD SET IN MASTIC BED, WEATHER STRIP, CYLINDER LOCK, CLOSURE PUSH & PULL UNLOCK/LOCK INDICATOR, FLAT BAR:YALE 2100-42689 (VERIFY WITH FIRE MARSHALL) MANUAL SURFACE OR FLUSH BOLTS NOT ALLOWED AT THIS DOOR.
B.1	1	3' X 7'	EXTERIOR STOREFRONT ALUMINUM WITH TEMPERED GLASS	STOREFRONT ALUMINUM	PROVIDE : 3 PAIR PIVOT HINGES, THRESHOLD SET IN MASTIC BED, WEATHER STRIP, CYLINDER LOCK, CLOSURE PUSH & PULL UNLOCK/LOCK INDICATOR, FLAT BAR:YALE 2100-42689 (VERIFY WITH FIRE MARSHALL)
C.1	1	3' X 7'			
A.2	1	3' X 7'	18 GA. INSULATED HOLLOW METAL STEEL DOOR	16 GA. STEEL FRAME	COORDINATE A.2 DOOR HARDWARE WITH TENANT DRAWINGS PROVIDE : 1) HINGES: PEMKO CFM95HD1, 2) YALE UNI-4410 689 6190, 3) LATCH GUARD: MCKINNEY LP01 US32D EXIT DEVICE: YALE 2100-42689, EXIT ALARM: DETEX EAX-600, 4). WEATHER STRIPPING: PEMKO 303AS, RAIN DRIP: PEMKO 346A, 5) THRESHOLD: PEMKO 168 A, 6). IVES 8400 10"X34" US32D (PUSH SIDE ONLY).
C.2	1	3' X 7'			
D.1	1	3' X 7'	18 GA. INSULATED HOLLOW METAL STEEL DOOR	16 GA. STEEL FRAME	PROVIDE : 3 PAIR BUTT HINGES, THRESHOLD SET IN MASTIC BED, WEATHER STRIP, CYLINDER LOCK, HEAVY DUTY STEEL SECURITY LATCH COVER, SWEETSTRIP, RAINDRIPP. (VERIFY WITH FIRE MARSHALL).

WINDOW SCHEDULE

INSTALLED AND FURNISHED BY G.C. UNLESS NOTED OTHERWISE

SYM	WIDTH	HEIGHT	GLASS	FRAME	REMARKS
A	22'-0" LIN. FEET	10'-0"	1" INSULATED GLASS	DARK BRONZE ALUMINUM STOREFRONT	1" INSULATED GLAZING, IN 4.5" X 2" IN ANODIZED ALUMINUM FRAME REFER WINDOW TYPES FOR INDIVIDUAL SIZES
B	16'-9" LIN. FEET	10'-0"	1" INSULATED GLASS	DARK BRONZE ALUMINUM STOREFRONT	1" INSULATED GLAZING, IN 4.5" X 2" IN ANODIZED ALUMINUM FRAME REFER WINDOW TYPES FOR INDIVIDUAL SIZES
C	12'-4" LIN. FEET	10'-0"	1" INSULATED GLASS	DARK BRONZE ALUMINUM STOREFRONT	1" INSULATED GLAZING, IN 4.5" X 2" IN ANODIZED ALUMINUM FRAME REFER WINDOW TYPES FOR INDIVIDUAL SIZES
D	21'-8" LIN. FEET	10'-0"	1" INSULATED GLASS	DARK BRONZE ALUMINUM STOREFRONT	1" INSULATED GLAZING, IN 4.5" X 2" IN ANODIZED ALUMINUM FRAME REFER WINDOW TYPES FOR INDIVIDUAL SIZES
E	22'-0" LIN. FEET	10'-0"	1" INSULATED GLASS	DARK BRONZE ALUMINUM STOREFRONT	1" INSULATED GLAZING, IN 4.5" X 2" IN ANODIZED ALUMINUM FRAME REFER WINDOW TYPES FOR INDIVIDUAL SIZES
F	22'-0" LIN. FEET	10'-0"	1" INSULATED GLASS	DARK BRONZE ALUMINUM STOREFRONT	1" INSULATED GLAZING, IN 4.5" X 2" IN ANODIZED ALUMINUM FRAME REFER WINDOW TYPES FOR INDIVIDUAL SIZES
G	22'-0" LIN. FEET	7'-4"	1" INSULATED SPANDREL GLASS	DARK BRONZE ALUMINUM STOREFRONT	1" INSULATED GLAZING, IN 4.5" X 2" IN ANODIZED ALUMINUM FRAME REFER WINDOW TYPES FOR INDIVIDUAL SIZES
H	22'-0" LIN. FEET	7'-4"	1" INSULATED SPANDREL GLASS	DARK BRONZE ALUMINUM STOREFRONT	1" INSULATED GLAZING, IN 4.5" X 2" IN ANODIZED ALUMINUM FRAME REFER WINDOW TYPES FOR INDIVIDUAL SIZES
L	22'-0" LIN. FEET	10'-0"	1" INSULATED GLASS	DARK BRONZE ALUMINUM STOREFRONT	1" INSULATED GLAZING, IN 4.5" X 2" IN ANODIZED ALUMINUM FRAME REFER WINDOW TYPES FOR INDIVIDUAL SIZES

NOTES

1. INSULATING GLASS VITRO ARCHITECTURAL GLAZING SOLARBAN 60 LOW E: WINTER U=0.25 SHGC: 0.36 VIS TRANS: 0.76 UV ENERGY: 46%
2. DOORS: FULL GLAZED DOORS W/10" KICK BASE, ANODIZED ALUM FINISH. REFER HARDWARE SCHEDULE.
3. WINDOW DIMENSIONS ARE FOR BIDDING PURPOSES ONLY. G.C. TO VERIFY ACTUAL WINDOW DIMENSIONS PRIOR TO FABRICATION INSTALLATION.
4. GLASS FACADE AND ENTRY DOORS TO BE DESIGNED, DETAILED, FACTORY FABRICATED AND SITE ASSEMBLED AND ERECTED.
5. MANUFACTURER: QUIK-SERV, MODEL SST-4860E WITH THRU-BEAM PHOTO-ELECTRIC BAR. REGIONAL APPLICATION WITH CF-25 NON HEATED AIR CURTAIN OR CHF-25 HEATED AIR CURTAIN. TYPE OF AIR CURTAIN LISTED ON WINDOW SCHEDULE.
6. WINDOW SYSTEM SHALL COMPLY WITH APPLICABLE SECTION AND CHAPTER 0F BUILDING CODE.

TEMPERED GLASS (T)

DOOR SCHEDULE 3
Scale= NO SCALE A 6.1

WINDOW SCHEDULE 2
Scale= NO SCALE A 6.1

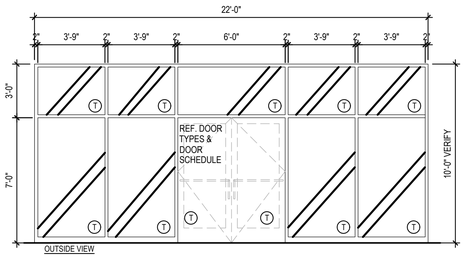

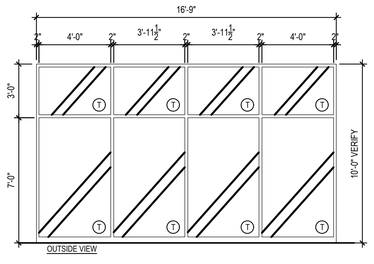



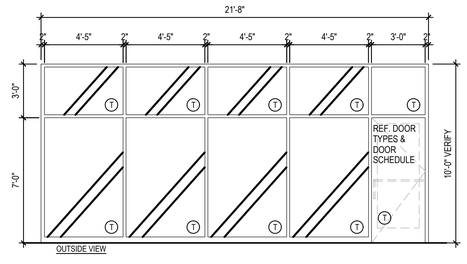

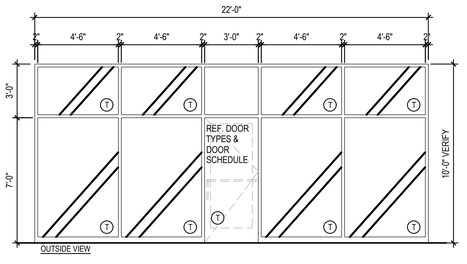

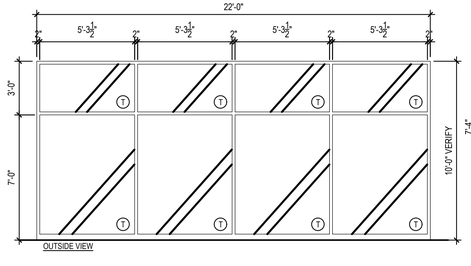

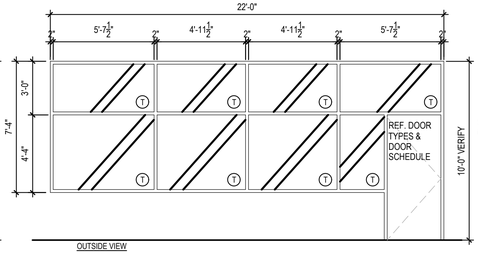

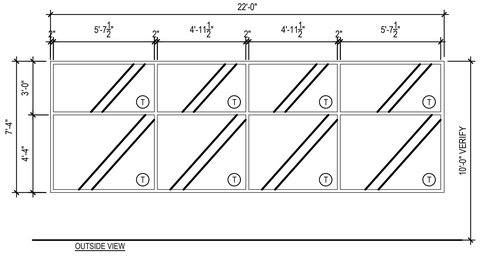

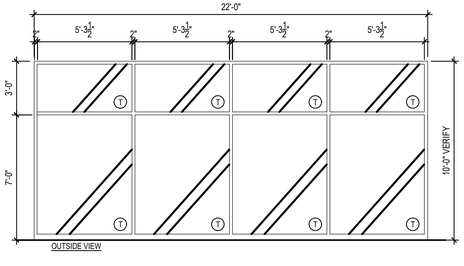

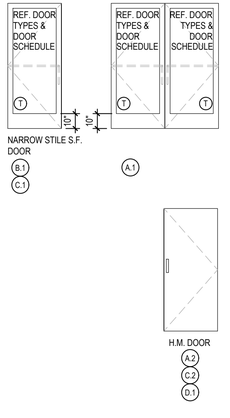

WINDOW ELEVATIONS 1
Scale= 1/4" = 1'-0" A 6.1

CFT NV DEVELOPMENT, LLC.
1120 N. Town Center Dr., Suite 150
Las Vegas, Nevada 89144
Telephone: 626.372.8425
Facsimile: 626.372.8288

All ideas, designs, arrangement and plans indicated or represented by this drawing are the property of CFT Development, LLC. and were created for use on this specific project. None of these ideas, designs, arrangements or plans may be used by or disclosed to any person, firm, or corporation without the written permission of CFT Development, LLC.

REVISIONS:

ISSUE DATE:

BIDS	2-10-23

DRAWN BY: AB

CFT PROJECT #: 1241

ARCH PROJECT #: JCDT22004700

NORR
ARCHITECTS ENGINEERS PLANNERS

BUILDING B - (SHELL ONLY)

MULTI-TENANT (3 UNITS)

N. PRINCE FREDERICK BLVD & TRASKERS BLVD
PRINCE FREDERICK, MD 20678

A 6.1

WINDOW ELEVATIONS

CFT MULTI-TENANT (3 UNITS)